



- Perfect heat & pressure distribution
- single manual swing plate of 40x50 cm
- Manual rotation on One & Lite
- Automatic rotation on Pro v2

## User friendly :

- \* Complete lateral clearance of the plate
- \* Automatic opening by electromagnet (Lite & Pro only)
- \* Reversible C-shaped part & Quick Release

- Robust frame
- Suitable for laser transfer applications & sublimation on textile and rigid materials
- Ideal for small to medium productions
- Manufactured in France
- 2-year guarantee on the machine
- 10-year guarantee on heating element



Autoswing  
on Rotex Pro  
only



Set programs



QuickRelease®  
system



GPX 3200W  
(Pro version)



Pre-heat time




Electromagnetic  
(Lite & Pro version)


## OPTIONAL ACCESSORIES



Support table




DTG plate




Set of 4 plates




Laser pointer




Teflon Sheet



Nomex® cover



Shoe plate



Height indicator

Email

sales@sefa.fr  
support@sefa.fr  
www.sefa.fr



Phone

Office : + 33 4 68 74 05 89  
Fax : + 33 4 68 74 24 08



Address

SEFA SAS  
Z.I. PASTABRAC  
11 260 ESPERAZA (FR)



TRANSFER  
YOUR IMAGINATION

Chemica | Stillscreen | Sefa | Eims | TransferID


## TECHNICAL CHARACTERISTICS

Type	Electromagnetic (Rotex Lite & Pro) Manual (Rotex One)
Operation	Swing - Rotating plate Autoswing on Rotex Pro
Platen size	40x50 cm / 16x20"
Max thickness	17 mm
Weight	81 Kg
Pressure	590 gr/cm <sup>2</sup>
°C / °F Max	220 °C / 429 °F
Power	2500 W (One & Lite) 3200 W (Pro)
Power supply	240 V Single-phase
Amperage	11 A (One & Lite) 14 A (Pro)
Applications	Direct to Garment, Flex, Textile Sublimation, Laser Transfer, Screen Printing
Dimensions	759x909x569 mm 30x36x22"


## OPTIONAL ACCESSORIES



**TAB-98 LITE**  
Support table




**PLA-DRY M**  
Sponge plate to dry  
pretreated clothes.




**PLA-SET**  
Set of 4 plates  
12 x 8 cm, 15 x 15 cm,  
12 x 45 cm, 25 x 30 cm.




**CROI-161**  
Laser system to place your  
transfers with more pre-  
cision (1 extra laser can be  
added).



**PLA-SHOES-CV**  
Special plate that fits textile  
and sport shoes (side and  
back).



**HOU-50**  
Heat resistant Nomex® co-  
ver for easier threading and  
protection.



**ROTEX-IND**  
Full version of the Rotex with  
height indicator (can't be  
added separately).

## SETTINGS




Electronics developed by Sefa

Accurate and fast regulation (PID control) for a wide range of heat transfer products : Flex, flock, sublimation, screen printing transfer.  
Double timer (main + pre-heat)  
2 cycle counters  
3 settable programs  
Stop cycle function  
From 0 to 570 sec (precision +/- 1%).  
From 0 to 220°C (precision +/- 1%).  
Heating time to reach 180°C : 15 min.



180° reversible  
C-shaped lower  
part with Quick  
Release system

## DIMENSIONS

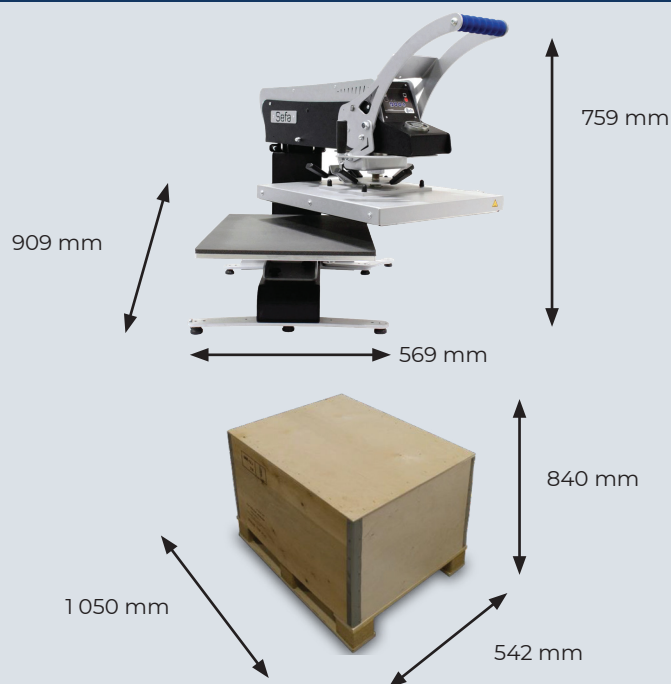

Box weight CAI-100 : 25 kg